




Jawbone Big Jambox Outer Case Replacement

Prerequisite Only. How to take apart Jawbone Big Jambox for replacement of key components.

Written By: Abby Cybula

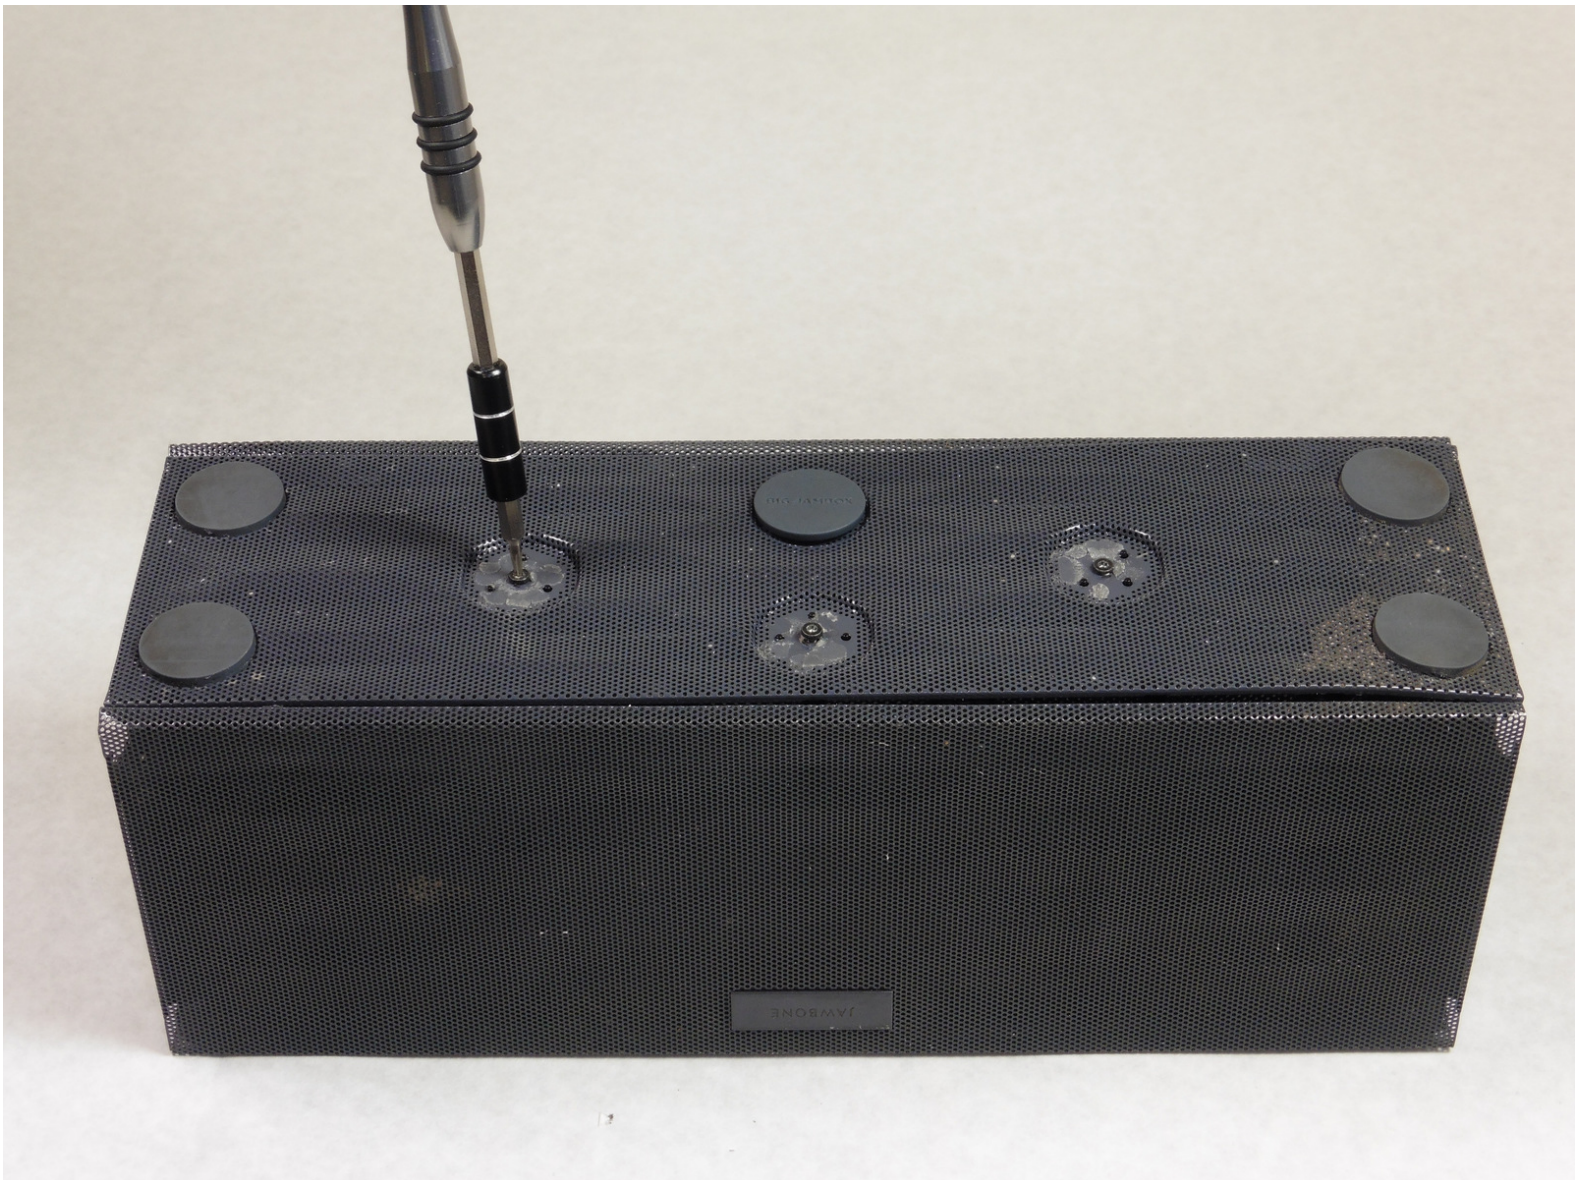


INTRODUCTION

Step-by-step guide to take apart Jawbone Big Jambox to expose the inside guts for certain part replacements. This guide will require unscrewing and prying at the device.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-



Step 1 — Outer Case

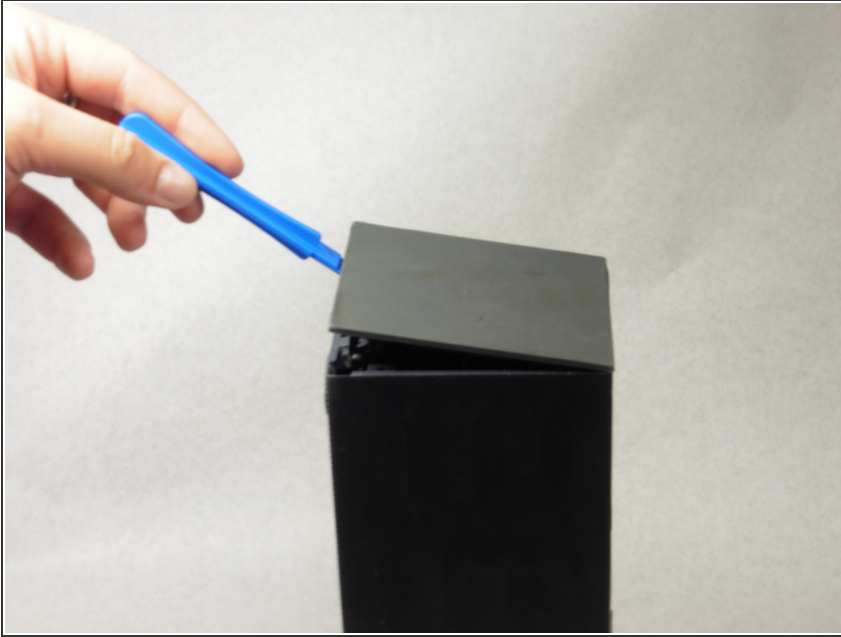

- Remove both end caps by putting a plastic opening tool in the center of the seam. Work around the edges to pry the end caps off completely.

i Due to interior clips holding the end caps in place, use caution when applying force.

Step 2

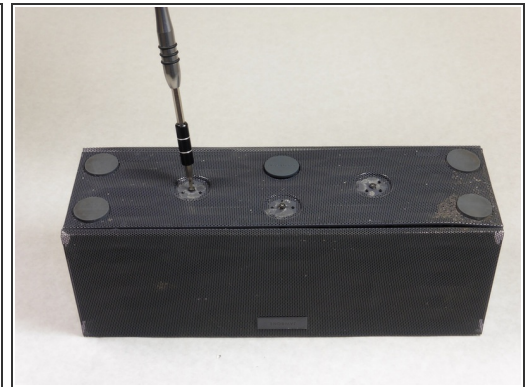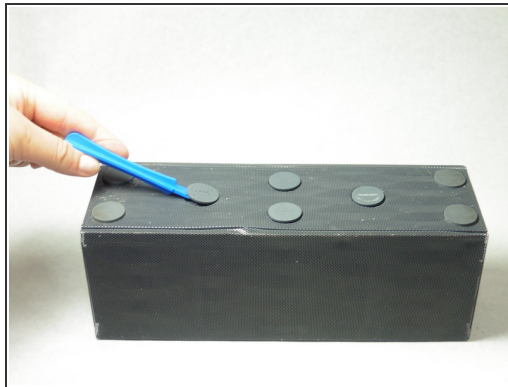


- Turn the Jambox upside down. Peel the indicated rubber tabs off, using a plastic opening tool if necessary.

i You may want to only take the tabs half way off to avoid re-gluing when reassembling.

- Use a screwdriver to remove the three T6, 7.0 mm screws under each rubber tab.


✦ Because the screws are a different length, set the screws aside.

Step 3

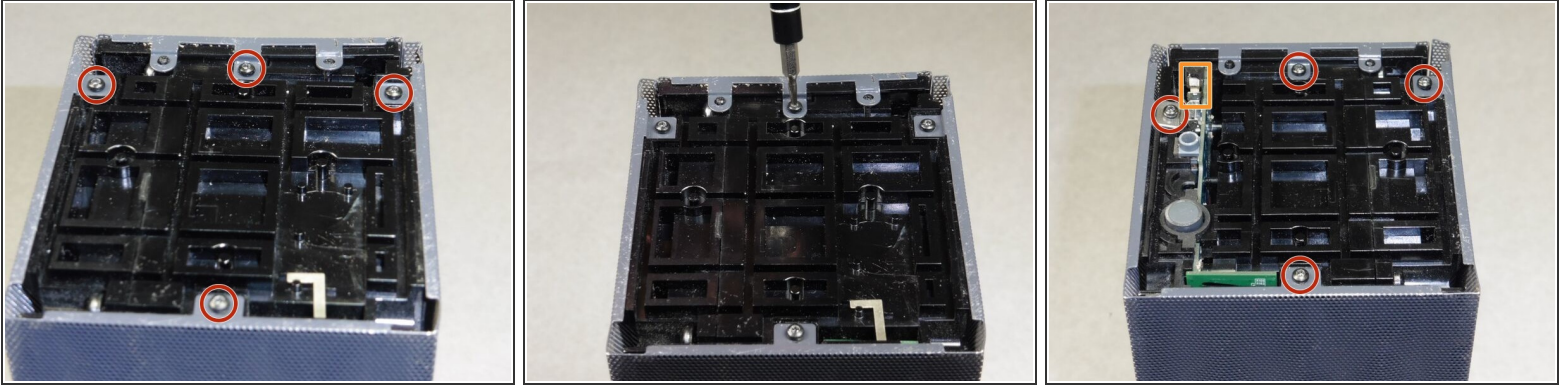

- With the Jawbone logo facing towards you and with correct orientation, place the Jambox with the left end cap facing upward.
- Unscrew indicated T6 9.7 mm screws.
- Flip the Jambox so the other end cap is facing up. The USB cable is on this side (metal grounding clip, indicated in orange). Repeat the above step.

Step 4

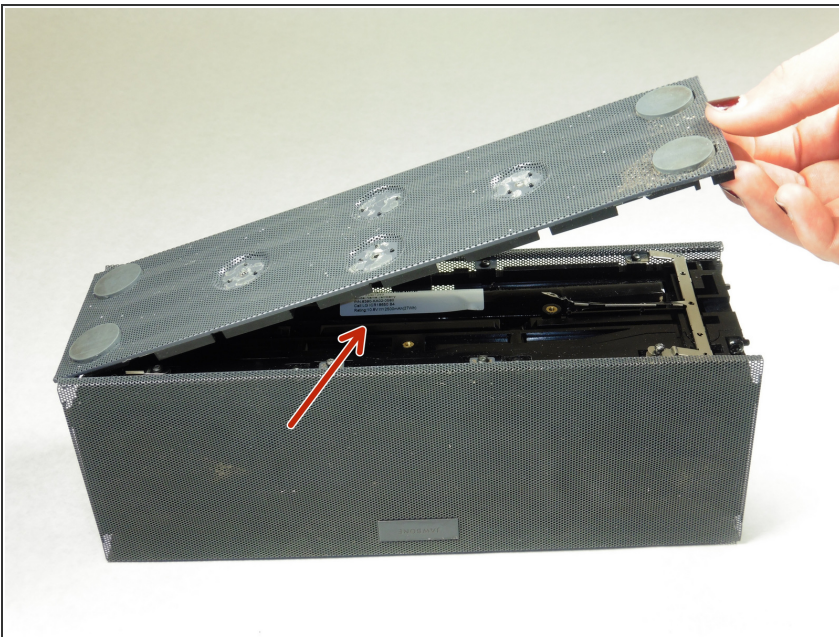

- Pry up the bottom panel by lifting from the device.
- Pull the bottom up. This may take a bit of force as the bottom is glued to device.
- Once removed, the battery will now be visible.


Step 5



i Before unscrewing, take a picture of the top view. That way, when you're reassembling the device, you'll know the orientation of the metal grounding plates.


- Unscrew the eight indicated T6 9.8 mm screws. Remove metal grounding plates.

Step 6

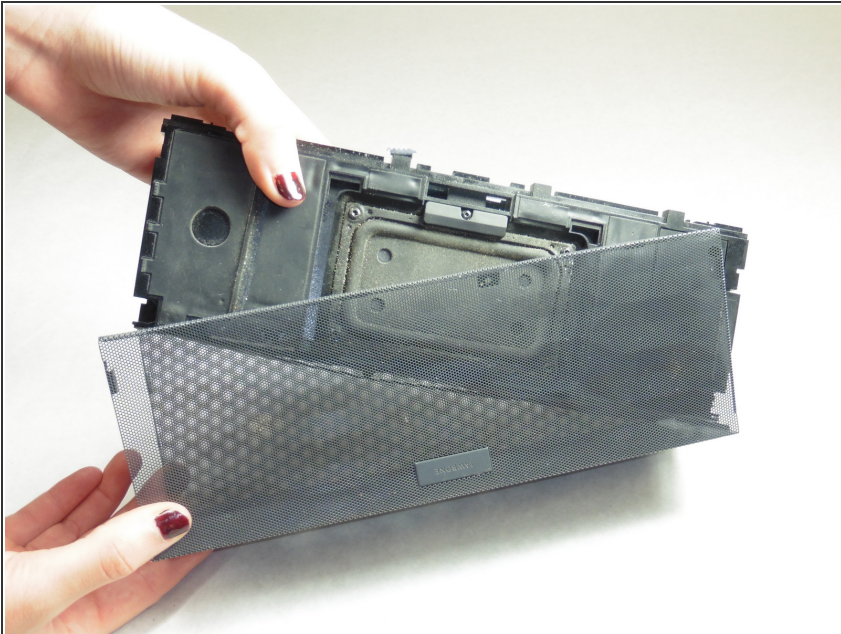

- Once all eight screws are removed, pry the sides of the Jambox to lift the body from it's shell.

Step 7

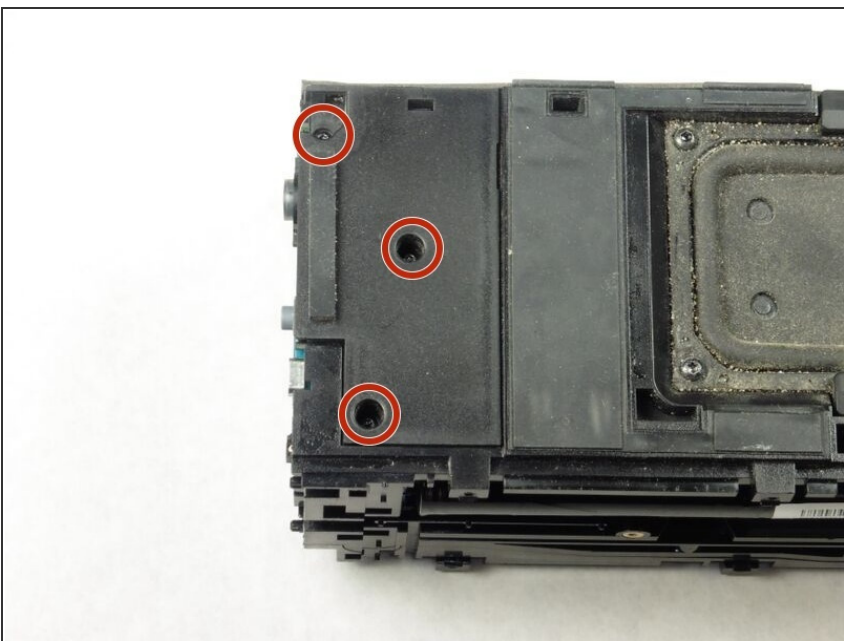

- With the battery facing forward, remove the three indicated T6 9.5 mm screws.
- Once the screws are removed, lift up the small plastic plate, revealing the auxiliary board underneath.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-06 01:32:14 PM.